

Waterproof Constant voltage LED driver



Features特征:


- Constant voltage output;输出模式: 恒压;
- 0/1-10V/PWM/resistor compatible;0/1-10V/PWM/电阻兼容
- Using active built-in PFC techology;采用PFC技术;
- Efficiency>90% PF>0.95;效率>90%功率因素PF>0.98;
- Protection:SCP/OVP;短路保护 过压保护;
- Aluminum silicone gel potted waterproof IP67 protection;铝外壳硅胶防水IP67等级;
- Easy to install;容易安装;
- Noise free,flicker free;无噪音, 无频闪;
- CE/ROHS/SAA/TUV passed;CE/ROHS/SAA/TUV认证;
- 5 Years warranty.5年质保。

规格书Specification Sheet


名称Model	CV输出	参数Parameter		
输出 Output	输出电流 Output current	31A	21A	16A
	恒压精度 Current precision	±5%		
	输出电压 Output voltage	24V	36V	48V
	输出功率 Output Power	800W max		
输入 Input	输入电压 Input Voltage Range	100-277V/AC(standard) 90VAC(min)305V/AC(max)		
	输入电流 AC Current(Typ)	7A@100VAC 6.8A@110VAC 3.5A@230VAC 3.4@260VAC		
	频率 Frequency Range	50/60Hz		
	功率因数	PF>0.95@230V		
	效率 Full-loading Efficiency	>90%	>90%	>91%
异常保护 Protection	保护类型 Short Circuit	Short circuit protection / Over voltage protection		
	最大输入电压Over Voltage	<305VAC		
使用环境 Environment	工作温度Operation Temperature	-20—+60℃		
	工作湿度Operation Humidity	20-90%		
	存储 Storage	-40—+85℃, 10-95%RH		
	温度系数Temperature Coefficient	±0.03%/℃(0~50℃)		
	抗震能力Vibration Resistance	10~500HZ,2G 10Min/period,X、Y、Z line per 60 mins		
安规与电磁兼容 Safety&EMC	标准 Standard	Refer to EN 61347-1;EN 61347-2-13; EN 62493		
	耐压 Withstand Voltage	I/P-O/P:3.75KVAC		
	绝缘强度Insulating Strength	I/P-O/P:400M Ω/500 VDC/25℃/70%RH		
	传导 EMC Emission	To Correspond EN55015,EN61000-3-2(≧50% load)		
	辐射 EMC Immunity	To Correspond EN55015,EX61000-4-2,3,4,5,6,8,11,A Level of light industry standard(Surge 4KV)		
其他Other	重量Weight	3500g		
	尺寸Dimension	290*120*55mm (L*W*H) (
	材质Material	94V-0 PC fire retardant		
	颜色Color	white		
	包装Packing	44.5*28.5*17cm/4pcs		
NOTE	<p>All parameters are measured at normal temperture(25-28℃)</p> <p>1、Ripple & Noise are measured at 20KHz of bandwidth by using a 12" twisted pair-wire terminated with a 0.1 uf & 47uf parallel capacitor(@ full load).</p> <p>2、The efficiency measured at Max output voltage,and 230VAC with full load,if with 110VAC the efficiency will be lowered 0.5%~1.5%;Working 1~2 hours,efficiency will be higher 1.5%~1%than the initial stage.</p>			

Waterproof Constant voltage LED driver

1.Mechanical Specification

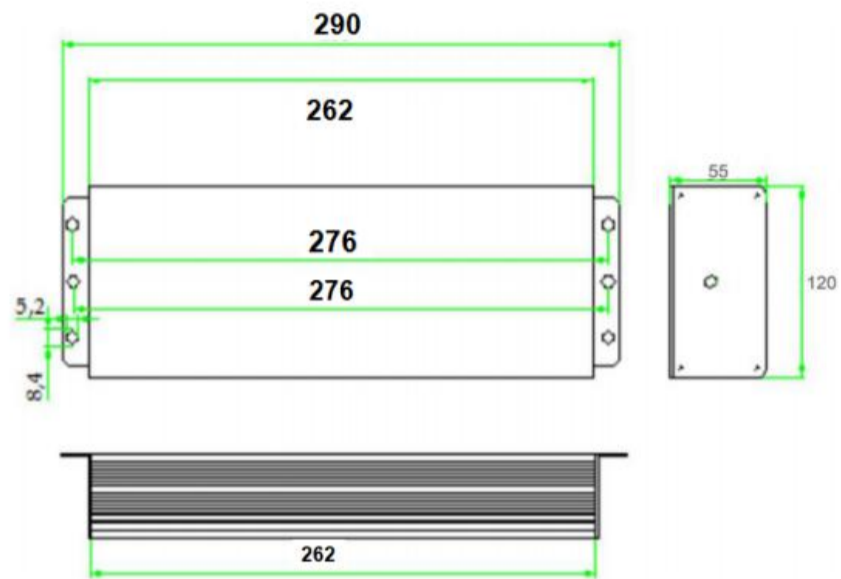

2.Power Factor Characteristics

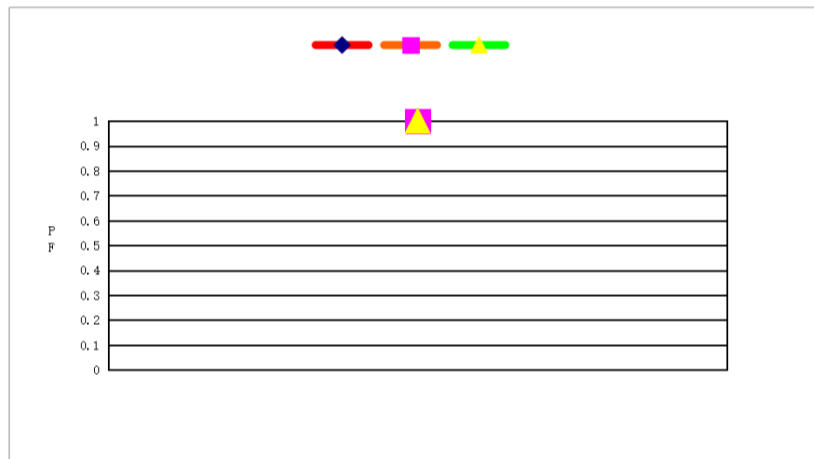

3.Efficiency & Load of (110VAC / 230VAC)

