

Constant current 0-10V dimmable LED driver



Features特征:


- The output current is constant;输出模式: 恒流;
- 0/1-10V/PWM/potentionmeter comptabile;0/1-10V/PWM/电阻兼容;
- Using active built-in PFC techology;采用PFC技术;
- Efficiency>85% PF>0.95;效率>85%功率因素PF>0.95;
- Protection:SCP/OVP;短路保护 过压保护;
- Fireproof plastic case;塑料防火外壳;
- Easy to install;容易安装;
- Noise free;无噪音;
- CE/ROHS/SAATUV passed;CE/ROHS/SAATUV认证;
- Hipot \geq 3750V, Surge:L-N \geq 1000V 过高压3750V测试, 浪涌 \geq 1000V
- 5 Years warranty.5年质保。

规格书Specification Sheet


名称Model	CC输出	MSD-0/10V-CC-12W	
输出 Output	输出电流 Output current	200mA	300mA
	恒流精度 Current precision	$\pm 5\%$	
	输出电压 Output voltage	43-58V	27-42V
	输出功率 Output Power	14W Max	
输入 Input	输入电压 Input Voltage Range	100-277V/AC(standard) 85VAC(min)305V/AC(max)	
	输入电流 AC Current(Typ)	0.14A@100VAC 0.13A@110VAC 0.06A@220VAC 0.05A@264VAC	
	频率 Frequency Range	50/60Hz	
	功率因数	PF>0.95@220V	
	效率 Full-loading Efficiency	>85%@full load	
异常保护 Protection	保护类型 Short Circuit	Short circuit protection / Over voltage protection	
	最大输入电压Over Voltage	<305VAC	
使用环境 Environment	工作温度Operation Temperature	-25—+45℃	
	工作湿度Operation Humidity	20-90%	
	存储 Storage	-40—+85℃, 10-95%RH	
	温度系数Temperature Coefficient	$\pm 0.03\%/^{\circ}\text{C}$ (0~50℃)	
	抗震能力Vibration Resistance	10~500HZ,2G 10Min/period,X、Y、Z line per 60 mins	
安规与电磁兼容 Safety&EMC	标准 Standard	Refer to EN 61347-1;EN 61347-2-13; EN 62493	
	耐压 Withstand Voltage	I/P-O/P:3.75KVAC	
	绝缘强度Insulating Strength	I/P-O/P:400M Ω /500 VDC/25℃/70%RH	
	传导 EMC Emission	To Correspond EN55015,EN61000-3-2($\geq 50\%$ load)	
	辐射 EMC Immunity	To Correspond EN55015,EX61000-4-2,3,4,5,6,8,11,A Level of light industry standard(Surge 4KV)	
其他Other	重量Weight	110g	
	尺寸Dimension	117*46*29mm (L*W*H)	
	材质Material	94V-0 PC fire retardant	
	颜色Color	white	
	包装Packing	31*17*18cm/30pcs	
NOTE	<p>All parameters are measured at normal temperture(25-28℃)</p> <p>1、Ripple & Noise are measured at 20KHz of bandwidth by using a 12" twisted pair-wire teminated with a 0.1 uf & 47uf parallel capacitor(@ full load).</p> <p>2、The efficiency measured at Max output voltage,and 230VAC with full load,if with 110VAC the efficiency will be lowered 0.5%~1.5%;Working 1~2 hours,efficiency will be higher 1.5%~1%than the initial stage.</p>		

Constant current 0-10V dimmable LED driver


1.Mechanical Specification

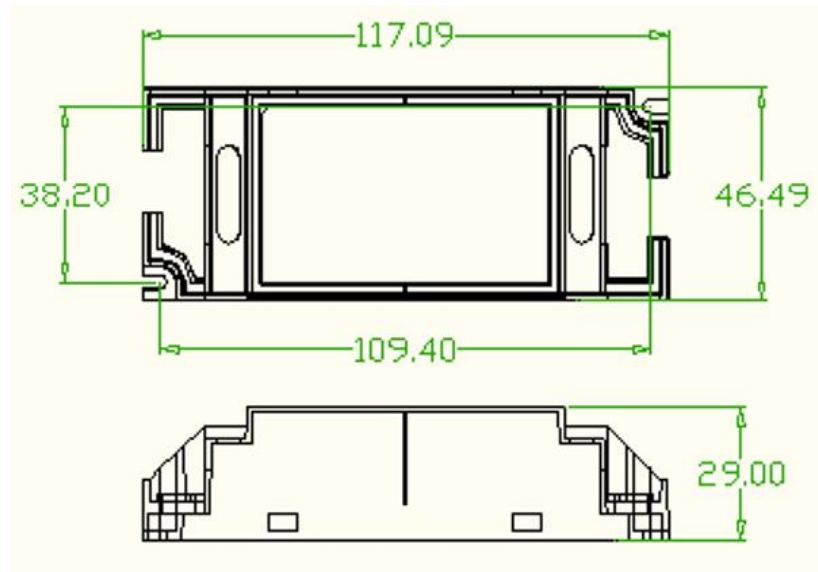


2.Power Factor Characteristics

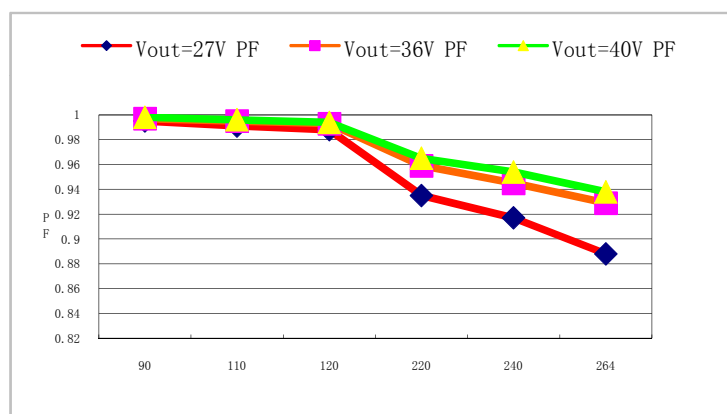

3.Efficiency & Load of (110VAC / 230VAC)

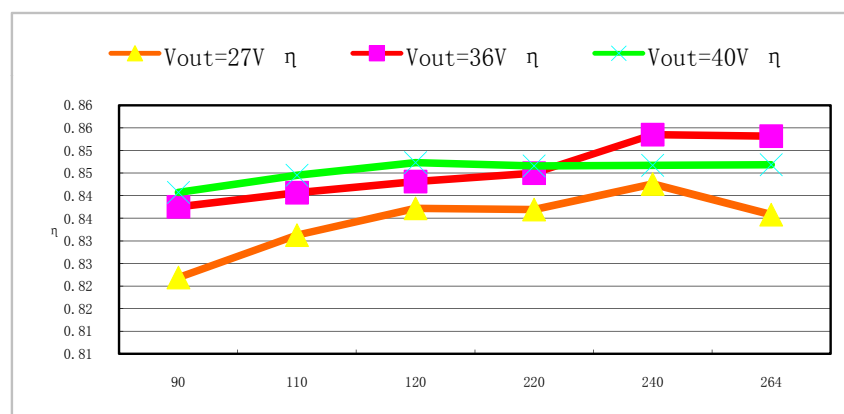

4.0/1-10V dimming Diagram

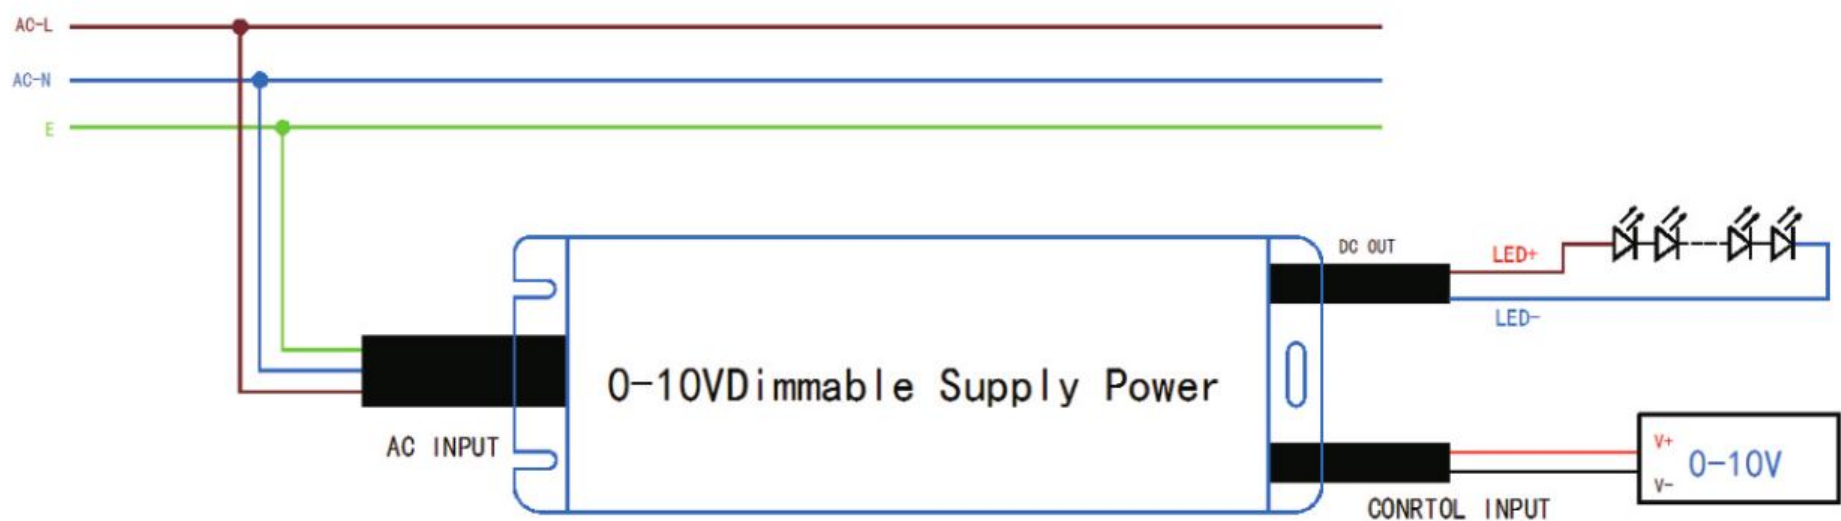

Web:www.sz-msd.com Tel:+86-755-29510721 Fax:+86-755-29518990

Email: victor@brightstarleds.com