

Product Features


- Wide input Voltage range 100-240VAVC
- Complete isolation design for safer use
- Excellent dimming effect & strong compatibility
- Support triac, 0-10V, PWM, Resistor dimming methods
- IP Grade: 67, suitable for indoor and outdoor usage
- Multiple protections like short circuit & over-current & over-voltage protection.
- CE SAA TUV ETL UL passed
- Natural wind heat dissipation
- Adopt active power factor correction design with high power factor
- High efficiency & long lifespan & 5 years warranty

MSD-MV200 Series



Naming rule

MSDMV200NTA24W

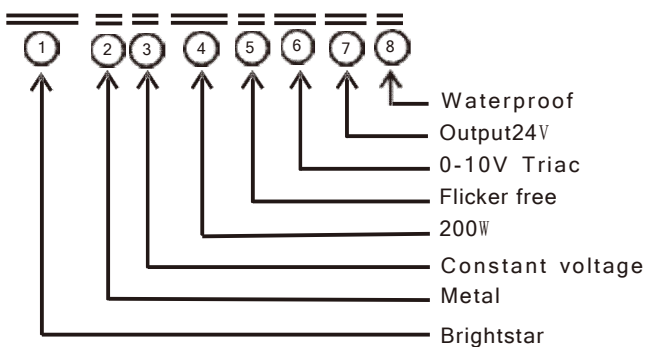

warning

The dimming product is only suitable for direct drive LEDs.

If there is a circuit drive LED or load with capacitance

inside the LED, it is not suitable for this dimming power supply.

Number	Function
①	MSD:Brightstar
②	M: Metal P: Plastic
③	V: Constant voltage C: Constant current
④	200: 200W
⑤	N: Flicker free Y: Flicker
⑥	A: 0-10V D: DALI T: TRIAC TA: 0-10V TRIAC P: PWM 0-10V RESISTANCE O: OTHER
⑦	Output voltage
⑧	W: Waterproof N: non waterproof

Technical Parameters

MSD-MV200 Series

Model		MSDMV200NTA12W	MSDMV200NTA24W	MSDMV200NTA36W	MSDMV200NTA48W
Output	Voltage	12V	24V	36V	48V
	Current	16.6A(Max)	8.33A(Max)	5.55A(Max)	4.16A(Max)
	Power	180-200W	180-200W	180-200W	180-200W
	Ripple& noise(max)	<200mVp-p	<250mVp-p	<250mVp-p	<250mVp-p
	Efficiency Full load	92%@110VAC	92%@110VAC	92%@110VAC	92%@110VAC
		90%@230VAC	92%@230VAC	92%@230VAC	92%@230VAC
	Start, rise time		500ms, 100ms/230VAC, 1000ms, 100ms/110VAC		
	Hold time		10ms/110VAC, 230VAC		
Input	Input voltage		100-240VAC		
	Frequency		50-60Hz		
	Power Factor		PF>0.98@110VAC PF>0.95@230VAC		
	THD		<17%@230V		
	Standby power		<1W		
	Current		1.5Amax@100VAC		
	Inrush Current		Cold start 75A(twidth=350us measured at 50% Ipeak)@230VAC		
Protection	Short Circuit		Close output,recovers after fault condition is removed		
	Over voltage		Hit cup,recovers after fault condition is removed		
	Over Load		Hic cup,recovers after fault condition is removed		
Safety& EMC	Surge		L-N:2KV,L,N-PG:4KV		
	Withstand Voltage		I/P-O/P:3.75KVAC/1min/5mA;I/P-GND:2KVAC/1min/5mA		
	Safety Standards		IEC/EN61347-1,IEC/EN61347-2-13		
Environment	Working Temp		-25℃~50℃		
	Storage Temp		-40℃~85℃		
	Tc		80℃		
	Material		Metal		
	IP Rating		IP67		
	Lifetime		6000h		
Others	Dimension		246 x68 x39 mm		
	Weight		1000g		

Note:


- 1.Unless otherwise specified, all specifications and parameters shall be measured at the input of 230VAC, rated load and ambient temperature of 25℃.
2. Ripple and noise measurement method: A12" twisted-pair line with 0.1uF and47uF capacitors in parallel should be used for measurement under 20MHZ bandwidth.
- 3.The start time is measured under the starting of the cold machine.
Frequent switching on and off may increase the start time.
4. The driver is regarded as a component used in combination with the terminal equipment.
Since the EMC is affected by the whole device, the manufacturer of the terminal equipment needs to reconfirm the EMC of the whole device.

Installation Introduction


MSD-MV200 Series



Dimensions Chart

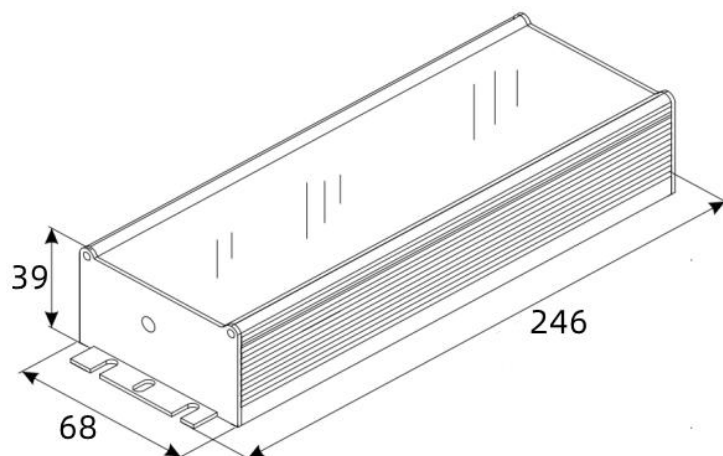

Install size

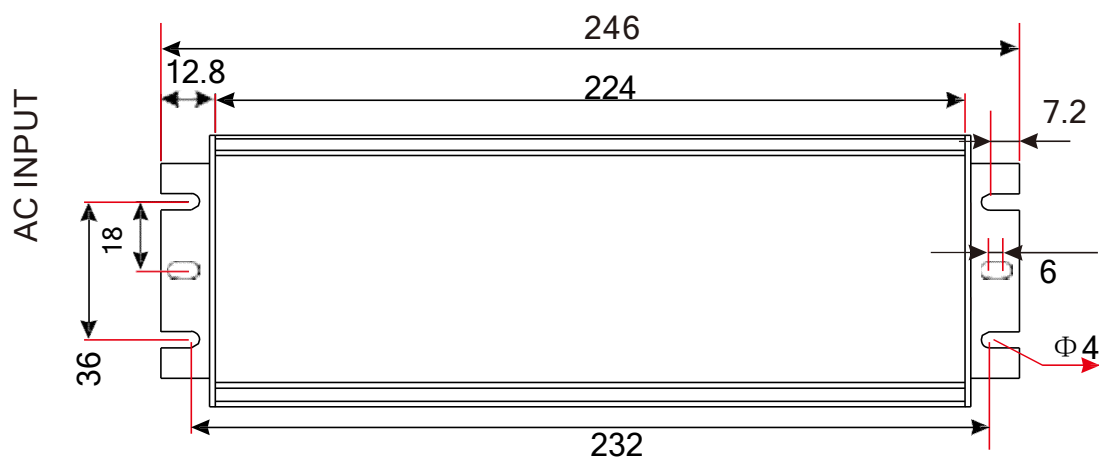

Unit:mm