


- The output voltage is constant.
- Fit for trailing&leading edge dimmers.
- Using active built-in PFC techology.
- Efficiency>83% PF>0.90.
- Protection:SCP/OVP.
- Aluminum waterproof design
- Easy to install
- Nature cooling
- CE/ROHS/SAA/TUV passed.
- 5 Years warranty

名称Model	恒压源CV	MSD-MV030NT12	MSD-MV030NT24
输出 Output	输出电压 Output Voltage	12V	24V
	恒压精度 Voltage Precision	±5%	
	输出电流 Output Current	2500ma	1250ma
	输出功率 Output Power	30W	30W
	线性调整率Line Regulation	1%	
输入 Input	输入电压 Input Voltage Range	AC 100-130V or 180-240V	
	输入电流 AC Current(Typ)	0.328A@110VAC	0.164A@220VAC
	频率 Frequency Range	47-63Hz	
	功率因数 PFC(Typ)	>0.90@full load	
	效率 Full-loading Efficiency	>82%@full load	>86%@full load
异常保护 Protection	保护类型 Short Circuit	Short circuit protection / Over voltage protection	
	最大输入电压Over Voltage	<265VAC	
使用环境 Environment	工作温度Operation Temperature	-25~+50℃	
	工作湿度Operation Humidity	20~90%	
	存储 Storage	-40~ +85℃， 10~95%RH	
	温度系数Temperature Coefficient	±0.03%/℃(-45~50℃)	
	抗震能力Vibration Resistance	10~500HZ,2G 10Min/period,X、 Y、 Z line per 60 mins	
安规与电磁兼容 Safety&EMC	标准 Standard	Refer to EN-60950-1	
	耐压 Withstand Voltage	I/P-O/P:3.75KVAC	
	绝缘强度Insulating Strength	I/P-O/P:400M Ω/500 VDC/25℃/70%RH	
	传导 EMC Emission	To Correspond EN55015,EN61000-3-2(≧ 50% load)	
	辐射 EMC Immunity	To Correspond EN55015,EX61000-4-2,3,4,5,6,8,11,A Level of light industry standard(Surge 4KV)	
其他Other	重量Weight	550g	
	尺寸Dimension	150*44*32mm (L*W*H)	
	PCB材质	94V-0 PC fire retardant	
	颜色Color	Dark Grey	
NOTE	All parameters are measured at normal temperture(25-28℃) 1、Ripple & Noise are measured at 20KHz of bandwidth by using a 12" twisted pair-wire teminated with a 0.1 uf & 47uf parallel capacitor(@ full load). 2、The efficiency measured at Max output voltage,and 230VAC with full load,if with 110VAC the efficiency will be lowered 0.5%~1.5%;Working 1~2 hours,efficiency will be higher 1.5%~1%than the initial stage.		

TRIAC dimmable constant voltage led driver

1.Dimension

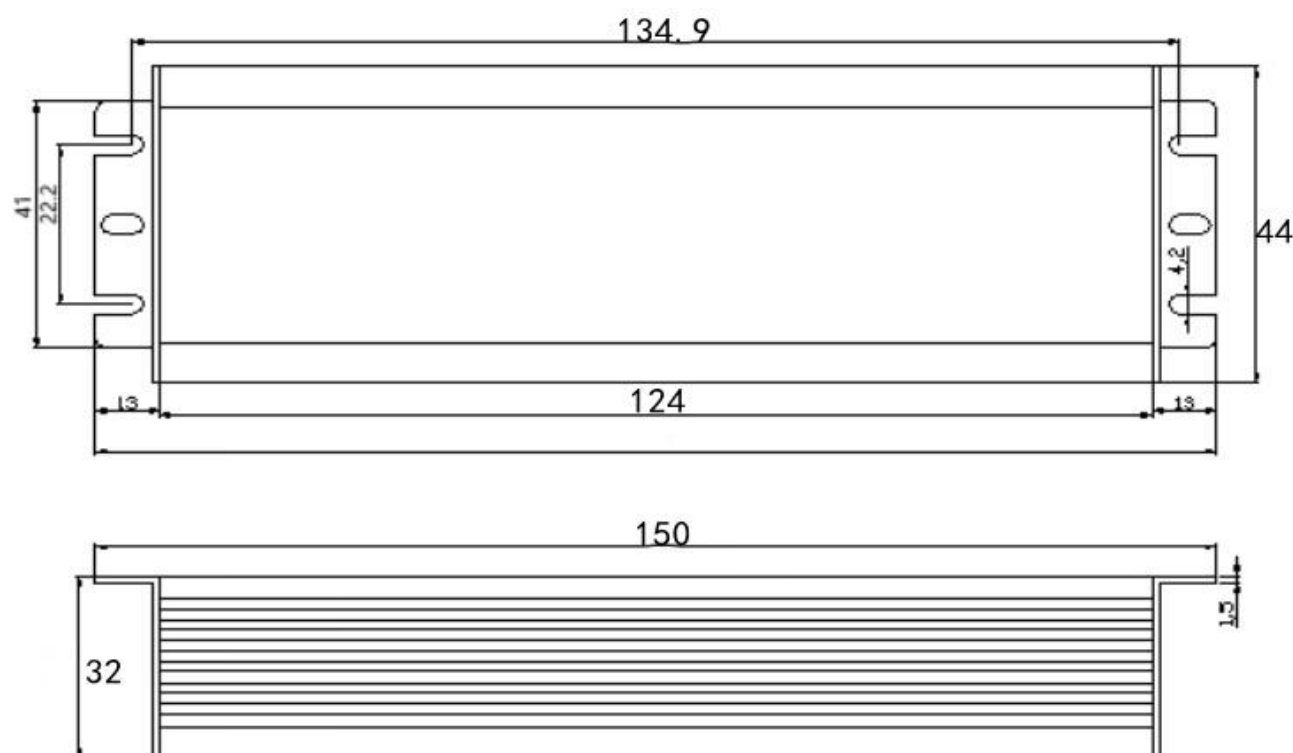

2.Wiring diagram

Dimmer (leading edge/trailing edge)

